




Frameless Far-Infrared Glass Panel Family

About Our Product Range:

Frameless Far-infrared Glass Panel

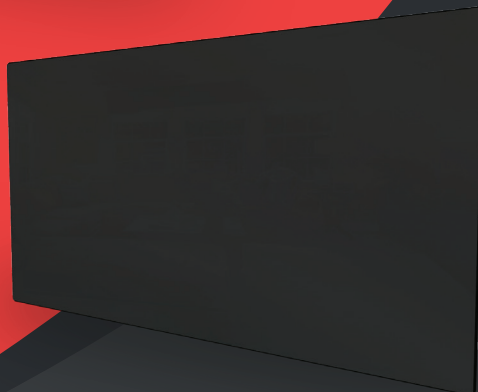

Available in black or white 70w-900w

The designer range of glass infrared heating panels. They are stylish and cost-effective. Our glass infrared panel heaters will add a premium level of sophistication to all types of rooms.

Our far-infrared heating panels will generate a healthy, comfortable and warm environment for everyone to enjoy.

With its IP65 rating, the panel is dust tight and is protected against water sprays. Making it an ideal solution for any room with great durability.

Its slimline profile gives the glass a floating effect on the walls. Frame-less and minimalistic, they are perfect for any modern environment.

Our panels operate at a fraction of the cost of traditional heating systems, whilst giving better thermal comfort levels.

They're available in both white and black toughened glass.

Manufacturer Material Specification

Surface Design:	Frameless Glass with Polished Edge
Heating Element:	Carbon Crystal Nanotech Ink
Material:	Premium Glass
Construction:	Tempered & Toughened Two-way Glass Mirror
Fixings:	Wall
Connection:	2-metre cable
Service Life:	20 Years
Warranty:	10 Years *Conditions Apply
IP Rating:	IP65

Probyn Electrical Ltd

Tel: +44 07855 856011

Email: mike@probynelectrical.co.uk

www.probynelectrical.co.uk

22 Mags Barrow, West Parley, Ferndown BH22 8PD


*Yandiya far-infrared panels must be used in conjunction with thermostat control units. We recommend installation by a qualified engineer.



Frameless Far-Infrared Glass Panel Family

Far-Infrared Glass Heating Panel CAD Drawings and Dimensions:


Panel thickness is 11mm and 15mm*; Depth of panel will increase by an additional 20mm if easy install cassette is used. Glass panels to be installed on the wall only, portrait or landscape.

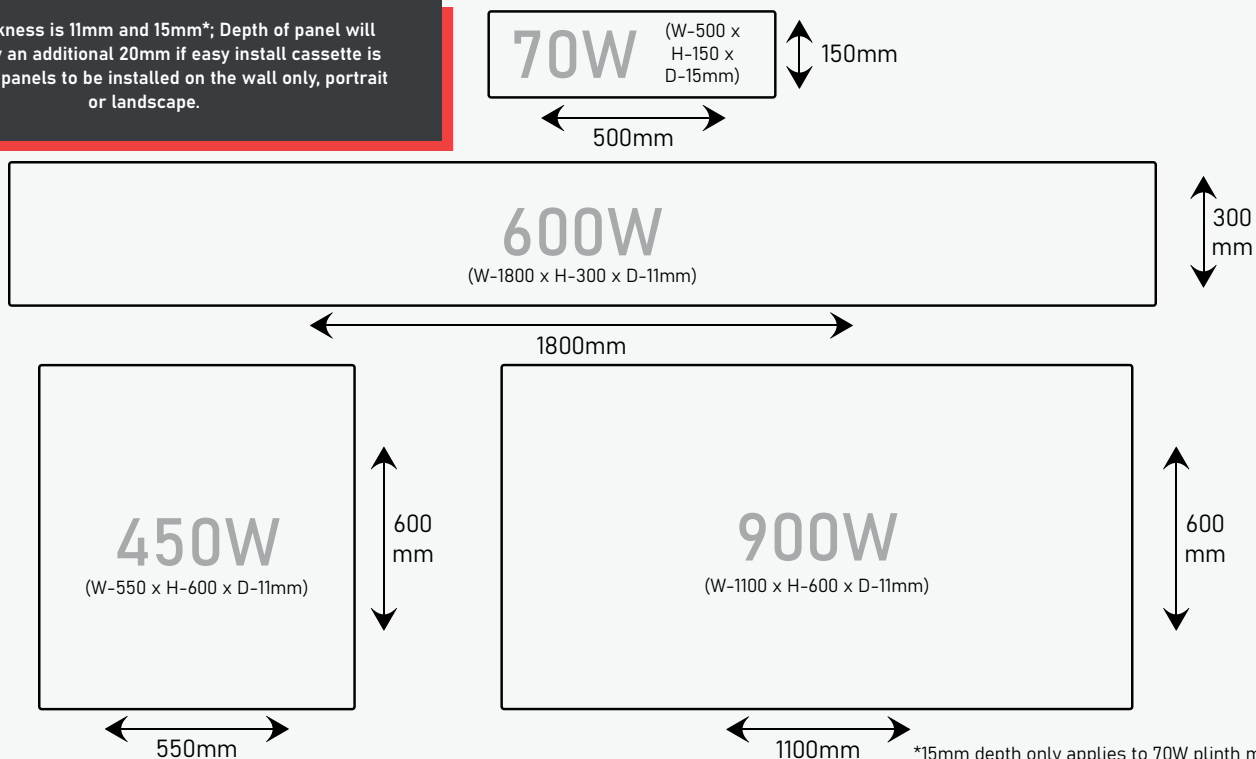

Frameless Far-Infrared Glass Heating Panel Technical Specifications:

Power Rated:	70 Watt	450 Watt	600 Watt	900 Watt
Voltage:	220/230	220/240	220/240	220/240
Amps:	0.32-0.29	2.05-1.88	2.72-2.50	4.09-3.75
Heating Coverage:	2.8m ²	7.50-8.65m ²	8.83-10.20m ²	13.23-15.00m ²
Temperature Range:	0/70°C	0/85°C	0/85°C	0/85°C
Overheat Protection:	120/130°C	120/130°C	120/130°C	120/130°C
kWh Per Annum:	n/a	996	1378	1620
Weight:	1.8 Kg	7.4 Kg	12.7 Kg	13.5 Kg
Energy Transfer:	98%	98%	98%	98%

Easy Install Cassette Technical Specifications With CAD Drawing and Dimensions:

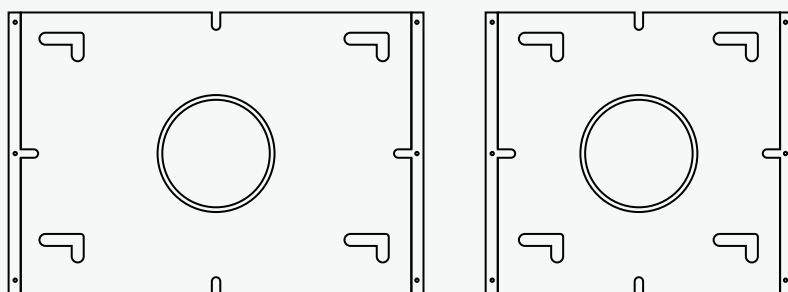

Dimensions (Large): 390mm x 540mm x 20mm

Weight: 1.24 Kg

Dimensions (Small): 250mm x 250mm x 20mm

Weight: 0.79 Kg

PLEASE NOTE: Our easy install cassette cannot be installed on 600W, 70W panel models, outdoor heaters as well as older model panels with installation bars on the back.

Probyn Electrical Ltd

Tel: +44 07855 856011

Email: mike@probynelectrical.co.uk

www.probynelectrical.co.uk

22 Mags Barrow, West Parley, Ferndown BH22 8PD

