



Frameless Far-Infrared Mirror Panel Family

About Our Product Range:

Frameless Far-Infrared Mirror Panel



Available in round* or square build; with or without LED

Our stylish, frame-less, mirrored infrared heaters are a perfect way to incorporate both a mirror and a heated panel, into one product.

With its IP65 rating, the panel is dust tight and is protected against water sprays. Making it an ideal solution for the bathroom with great durability.

Their unique anti-misting properties and polished edges, prevents any rusting on the mirror. Keeping it clean and looking as good as new when it's used.

By using the latest technology in the manufacturing process of glass mirrors, they are strong and sturdy with a tempered and toughened glass front.

Our frameless mirror panels are available in both a round or square build; available in 350watt or 500w sizes.

Manufacturer Material Specification

Surface Design:	Frameless Titan Glass Mirror with Polished Edge
Heating Element:	Carbon Crystal Nanotech Ink
Material:	Premium Frameless 5mm Glass Mirror With Polished Edge
Construction:	Tempered & Toughened Two-way Glass Mirror
Fixings:	Wall
Connection:	2-metre cable
Service Life:	20 Years
Warranty:	10 Years **Conditions Apply
IP Rating:	IP65

Probyn Electrical Ltd

Tel: +44 07855 856011

Email: mike@probynelectrical.co.uk

www.probynelectrical.co.uk

22 Mags Barrow, West Parley, Ferndown BH22 8PD


* Round mirror build only available on 500Watt model

**Yandiya far-infrared panels must be used in conjunction with thermostat control units. We recommend installation by a qualified engineer.



Frameless Far-Infrared Mirror Panel Family

Far-Infrared Mirror Heating Panel CAD Drawings and Dimensions:

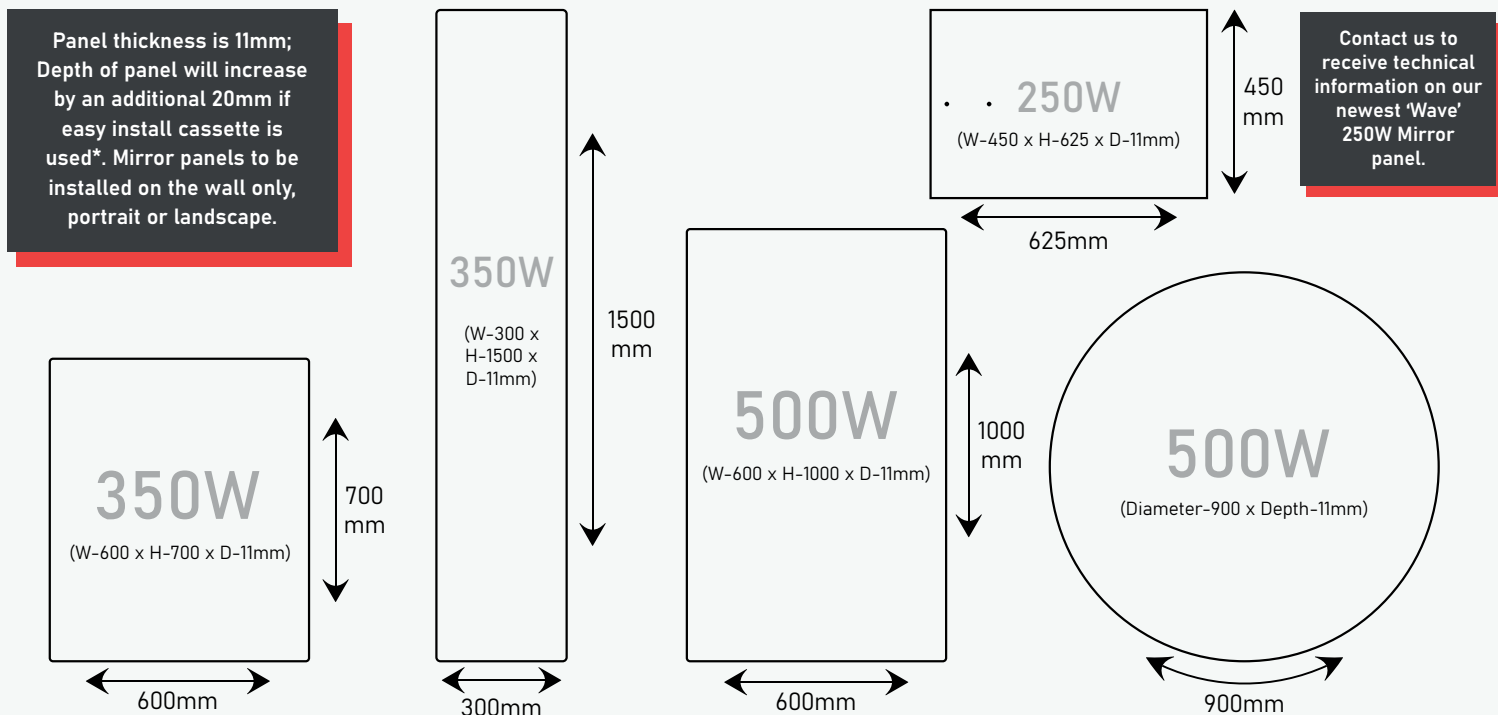


*500W Mirror models available only with installation bars

Frameless Far-Infrared Mirror Heating Panel Technical Specifications:

Power Rated:	350 Watt	350 Watt (Dress Mirror)	500 Watt	500 Watt (Round)
Voltage:	220/240	220/240	220/240	220/240
Amps:	1.59-1.46	1.59-1.46	2.27-2.08	2.27-2.08
Heating Coverage:	5.83-6.73m ²	5.83-6.73m ²	7.35-8.33m ²	7.35-8.33m ²
Temperature Range:	0/90°C	0/90°C	0/90°C	0/90°C
Overheat Protection:	120/130°C	120/130°C	120/130°C	120-130°C
kWh Per Annum:	635	635	1242	1242
Weight:	9.4 Kg (12.1 Kg W/LED)	9.4 Kg (10.6 Kg W/LED)	16.5 Kg (17 Kg W/LED)	13.2 Kg (13.7 Kg W/LED)
Energy Transfer:	98%	98%	98%	98%

Easy Install Cassette Technical Specifications With CAD Drawing and Dimensions:

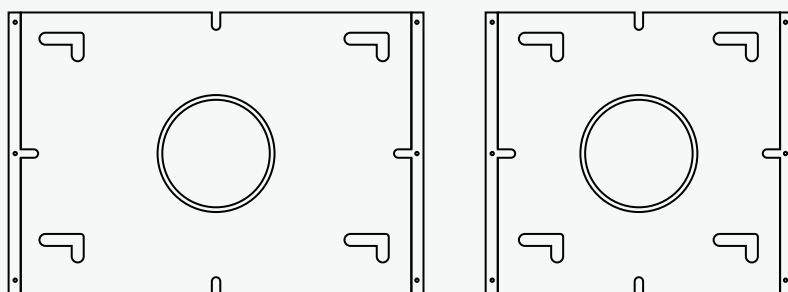

Dimensions (Large): 390mm x 540mm x 20mm

Weight: 1.24 Kg

Dimensions (Small): 250mm x 250mm x 20mm

Weight: 0.79 Kg

PLEASE NOTE: Our easy install cassette cannot be installed on 600W, 70W panel models, outdoor heaters as well as older model panels with installation bars on the back.

Probyn Electrical Ltd

Tel: +44 07855 856011

Email: mike@probynelectrical.co.uk

www.probynelectrical.co.uk

22 Mags Barrow, West Parley, Ferndown BH22 8PD

